




When Buying From Deso, You Are Buying More Than Products, You Are Buying Quality And Service

ELECTRIC CHAIN HOIST WITH TROLLEY(B TYPE)

- ✓ Fast Lifting Speed, Convenient Operation And Nice Appearance
- ✓ Overload Safety Protection And Hot Protection Make The Hoist Highest Safety Level
- ✓ Can Be Widely Used For lifting Light And Small Goods.
- ✓ Can Be Equipped With Wireless Remote Controller
- ✓ 24V low Voltage Control To Ensure Safety
- ✓ Non-Standard Power Supply Can Be Customized

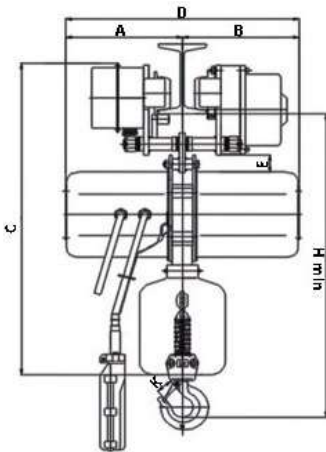

3-PHASE, SINGLE SPEED, WITH TROLLEY

Capacity(T)	0.5	0.5	1	2	3	5	10
Standard Lift(M)	3	3	3	3	3	3	3
Lifting Speed(M/Min)	8	7	7	3.5	2.3	2.6	2.6
Trolley Motor Power(Kw)	0.2	0.2	0.2	0.3	0.4	0.4	2*0.4
Hoist Motor Power(Kw)	0.45	0.8	1.6	1.6	1.6	3.0	2*3.0
Power Supply	3-Phase/380V/50HZ						
Control Voltage(V)	24V						
Insulation Grade	F						
Rating	30%						
Load Chain(MM)	Φ7.1×21					Φ9×27	
Falls of Load Chain	1	1	1	2	3	3	6
Working Level	M4	M4	M4	M4	M4	M3	M3
Running Test Load(T)	0.625	0.625	1.25	2.5	3.75	6.25	12.5
I-Beam Width(MM)	74-124	74-124	74-124	74-124	102-152	102-152	102-152
Length of Control Wire(M)	2.5	2.5	2.5	2.5	2.5	3	3
Net Weight(KG)	83	83	90	95	130	170	400
Weight for Extra Lifting Per M(KG)	1.1	1.1	1.1	2.2	3.3	5.3	10.6
Min Distance Between Hooks (MM)	520	520	520	640	710	850	1150
Dimension	A (MM)	245	245	245	245	245	265
	B (MM)	245	245	245	245	245	265
	C (MM)	710	710	710	710	710	950
	D (MM)	490	490	490	490	490	530
	E (MM)	40	40	40	40	40	52
	K (MM)	34	34	34	40	45	50
Packing Size(L*W*H) CM	87*47*42	87*47*42	87*47*42	87*47*42	87*56*45	87*60*48	110*80*80



When Buying From Deso, You Are Buying More Than Products, You Are Buying Quality And Service

1-PHASE, SINGLE SPEED, WITH TROLLEY

Capacity(T)		0.25	0.5	1	2	3
Standard Lift(M)		3	3	3	3	3
Lifting Speed(M/Min)		8	7	7	3.5	2.3
Trolley Motor Power(Kw)		0.2	0.2	0.2	0.3	0.4
Hoist Motor Power(Kw)		0.45	0.8	1.6	1.6	1.6
Power Supply	1-Phase/220V/50Hz					
Control Voltage(V)	24V					
Insulation Grade	F					
Rating	30%					
Load Chain(MM)	Φ5×15			Φ7.1×21		
Falls of Load Chain		1	1	1	2	3
Working Level		M4	M4	M4	M4	M4
Running Test Load(T)		0.31	0.625	1.25	2.5	3.75
I-Beam Width(MM)		74-124	74-124	74-124	74-124	102-152
Length of Control Wire(M)		2.5	2.5	2.5	2.5	2.5
Net Weight(KG)		60	88	96	100	135
Weight for Extra Lifting Per M(KG)		0.55	1.1	1.1	2.2	3.3
Min Distance Between Hooks (MM)		450	520	520	640	720
Dimension	A (MM)	210	245	245	245	245
	B (MM)	210	245	245	245	245
	C (MM)	116	710	710	710	710
	D (MM)	104	490	490	490	490
	E (MM)	262	40	40	40	40
	K (MM)	24	34	34	40	45
Packing Size(L*W*H) CM		60*40*38	87*47*42	87*47*42	87*56*45	87*60*48