


G80 ALLOY CHAIN

- Alloy chain is designed and manufactured for superior lifting performance. It can withstand more abuse, abrasion resistance, greater load lifting per size. It is lighter to handle for application. Produced from high quality alloy steel, heat treated and proof tested. Reliable for lifting applications.
- Safety factor: 4:1
- Embossed with marking for identification and traceability.
- Finish: black tempered, electro galvanized, hot dip galvanized, painted.
- Length and width of the chain link are adjustable.
- Can be manufactured in accordance with standard: EN818-2, ISO3077, JIS standard, US federal specification, etc.



Chain dia. D (mm)	Inside length E (mm)	Inside width Min. H (mm)	Outside width Max. G (mm)	Working load (t)	Weight (kg/m)
4	12	5	13	0.5	0.34
5	15	6.5	16.5	0.79	0.5
6	18	7.5	20	1.14	0.8
6.3	19.8	8.2	20.8	1.25	0.84
7	21	9	24.5	1.5	1.1
7.1	21.3	9	24.5	1.58	1.15
8	24	10	28	2	1.4
9	27	11	31.5	2.55	1.82
10	30	12.5	35	3.2	2.2
13	39	16.3	46	5.3	3.7
16	48	20	56	8	5.63
19	57	23.7	63.2	11.3	7.8
20	60	25	70	12.5	8.6
22	66	28	77	15.3	11
24	72	32	82	18	12.8
26	78	35	91	21.3	14.9
32	90	38	105	28.3	19.6
34	102	46.5	121.2	36.3	25.5
36	108	49.5	128.5	40.7	31
38	114	52	136	45.3	32
42	126	55.5	144.5	55.4	38.6
48	144	62.4	177.6	72.3	52
50	150	65	185	80	56
52	156	67.6	192.4	85	59
56	168	72.8	207.2	100	72.5
63	190	81.9	233.1	125	89
72	210	91	259	160	110

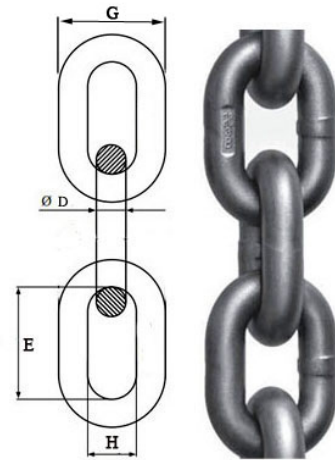

When Buying From Deso, You Are Buying More Than Products, You Are Buying Quality And Service